

## HKIZCONSAN / HKIZCONSIP

### Network Keyboard & Control Keyboard



### Features

- > Keyboard to Control:
  - ITZUMI Standalone DVR
  - ITZUMI High Speed Dome
  - ITZUMI Network High Speed Dome
  - Central Management Platform
  - Network Video Server
- > RS232, RS485 & Network Connections
- > Three Dimensional Joystick Control of PTZ Functions
- > Preset Position, Auto Scan, Auto Pan, Auto Tour & Pattern Control
- > Auxiliary Functions
- > On-Screen Menu & User Operation Procedure Tips


# HKIZCONSAN / HKIZCONSIP

## Technical Specifications

Model	HKIZCONSAN	HKIZCONSIP
<b>General</b>		
Keyboard Keypanel	Electromechanical	
Joystick	3-axis, vector-solving, with twisting, return to-center head	
Keyboard Connector	RJ-45, RS232, RS485	RS232, RS485
Keyboard Communication	Direct Mode, Network Mode	Direct Mode
Direct Mode	Interface: RS232/RS485 DVR Protocol: DH1/DH2 Dome Protocol: DH-SD/PELCO-D/PELCO-P/PELCO-D1/PELCO-P1	
Network Mode	Interface: RJ45 DVR/Network Dome: IP Address/Port/Protocol	N/A
Display	LCD, 84mm x 31mm	
<b>Environmental</b>		
Power Supply	Power adapter, input 100V~240V 50Hz / 60Hz,output DC12V/1000mA	
Power Consumption	5W	
Working Temperature	-10°C~+55°C	
Working Humidity	10%~90%	
Atmosphere Pressure	86kpa~106kpa	
Dimension	320mmx190mmx50mm (WxDxH) (height: 100mm including joystick)	
Weight	2.5KG	

## Connection Sample

### Direct Mode

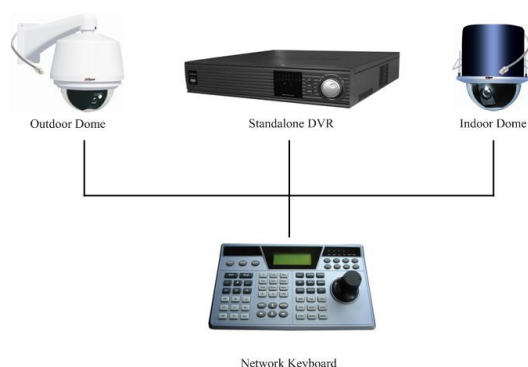

### Network Mode

